





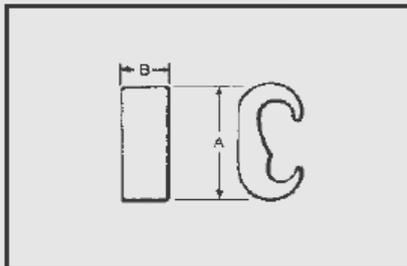

Burndy Hardware Components 'Grounding'

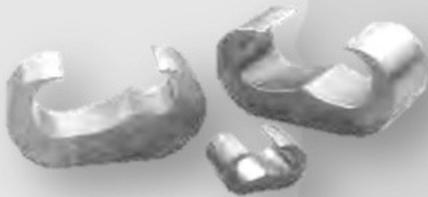

BARE COPPER

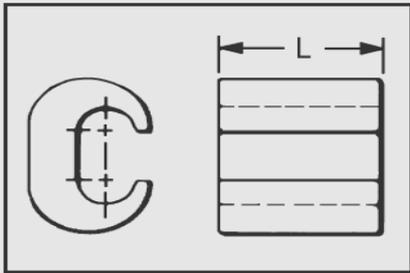

TYPE YC-C COPPER CRIMPIT™

UL Listed 90° C, 600 volts to 35 kV

Type YC-C copper CRIMPIT™ connector is a range-taking C shape compression connector for making tap or parallel copper connections from #12 solo. To 4/0 strand conductor.

Copperweld-Copper Conductors

- 8A - Use CRIMPITS™ accommodating 6 str. Copper
- 6A - Use CRIMPITS™ accommodating 4 Str. Copper
- 4A - Use CRIMPITS™ accommodating 2 Str. Copper
- 2A - Use CRIMPITS™ accommodating 1/0 and 2/0 Copper

TYPE YGHC-C HYTAP™ CONNECTOR

Irreversible comprehension ground tap figure "C" connectors.

Accommodates all cable combinations from #6 solid through 500 kcmil. "C" - shaped opening permits placing two continuous parallel cables into conductor groove. UL 467 Listed.

Acceptable for direct burial in earth or concrete. Prefilled with PENETROX™ compound and strip sealed.



UL96 Listed for Lightning Protection



WEB: www.austutilities.com.au
EMAIL: sales@austutilities.com.au

PHONE: 08 9406 3200