



# Forcorp Lights



## Light Bar 7440

- ◆ Low cost, super bright M-Tech Plus LED technology
- ◆ Class 1 Light Output
- ◆ Conformal coated circuitry protects against shock and vibration.
- ◆ 35 customer selectable flash patterns
- ◆ Extruded aluminium top and bottom
- ◆ Voltage: 10—16V DC



## Beacon

### 255H8TCL-A PERMANENT MOUNT 255H8TCLV-A MAG/VACUUM MOUNT

- ◆ 12/24 volt compatible.
- ◆ Size: 172mm H X 165mm DIA
- ◆ 360 Degree visibility.
- ◆ 24 Customer selectable Flash patterns .(2 x Rotating Patterns)
- ◆ Extremely low current Draw 0.7Amps @ 12 volt 0.3Amps @24 volt
- ◆ All polycarbonate body.
- ◆ Class 1 Light output.
- ◆ Completely Epoxy Encapsulated circuit for weather and shock resistance.
- ◆ Available in Permanent mount and mag/suction mount.



## Beacon

### 240H8SFL-A PERMANENT MOUNT 240H8SFLM-A MAG MOUNT

- ◆ 12/24 volt compatible.
- ◆ Size: 110mm H X 170mm DIA
- ◆ 360 Degree visibility.
- ◆ 24 Customer selectable Flash patterns .(2 x Rotating Patterns)
- ◆ Extremely low current Draw 0.6Amps @ 12 volt 0.4Amps @24 volt
- ◆ All polycarbonate lens with aluminium base.
- ◆ Class 1 Light output.
- ◆ Completely Epoxy Encapsulated circuit for weather and shock resistance.
- ◆ Available in Permanent mount and mag/suction mount.



**WEB:** [www.austutilities.com.au](http://www.austutilities.com.au)  
**EMAIL:** [sales@austutilities.com.au](mailto:sales@austutilities.com.au)

**PHONE:** 08 9406 3200



# Forcorp Lights



## Warning Stick/Traffic Director

TD93DLXT-47-45 (12 Volt)

TD93DLXT24-47-45 (24 Volt)

- ◆ Come in either 12 or 24 Volt.
- ◆ Size: 1220mm L x 70mm H x 40mm D
- ◆ Fully sealed DLXT heads on LED's
- ◆ Modes: Left arrow, right arrow, centre out, alternating (hazard)
- ◆ Extruded Aluminium with 1/4" mounting grooves on the back for easy mounting.
- ◆ Polycarbonate face shield on each individual head for easy cleaning.




## Low Profile Mini-Bar

9100LED-A PERMANENT MOUNT

9100LEDV-A MAG/VACUUM MOUNT

- ◆ 10—30Volt DC
- ◆ Amp Draw: 2.3 amps (max)
- ◆ Extremely Low profile
- ◆ Full 360° Class 1 Led output
- ◆ Super Bright M-tech® LED technology provides superior warning light image.
- ◆ Durable Polycarbonate injection moulded domes to protect against moisture
- ◆ Conformal coated circuitry protects against shock and vibration
- ◆ Size: 77mm H x 420mm L x 213 D

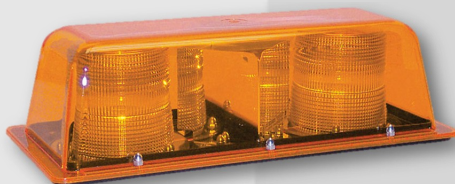

## Mini-Bar

9200H8L-A PERMANENT MOUNT

9200H8LV-A MAG/VACUUM MOUNT

- ◆ 12 Customer Selectable Patters
- ◆ Circuitry is fully encapsulated for increased weather and shock resistance
- ◆ 2 internal V-Mirrors enhance flashes
- ◆ Industrial grade virgin polycarbonate lens
- ◆ Synchronizing capability with other STAR LED products
- ◆ 12/24V Compatible
- ◆ Class 1 light output
- ◆ Available in Permanent mount and mag/suction mount
- ◆ Size: 115mm H x 410mm W x 185mm D



WEB: [www.austutilities.com.au](http://www.austutilities.com.au)  
EMAIL: [sales@austutilities.com.au](mailto:sales@austutilities.com.au)

PHONE: 08 9406 3200



## Forcorp Lights



### Mini-Beacon

200ZHL PERMANENT MOUNT

200ZHLM MAG MOUNT

- ◆ 4 LED Star Halo Tower
- ◆ Durable Polycarbonate, twist on/off lens
- ◆ Extremely low current draw
- ◆ Completely encapsulated circuit for increased weather and shock resistance
- ◆ Heavy duty die case base
- ◆ Voltage: 10—16V DC
- ◆ Amp Draw: 0.5 amps @ 12V DC
- ◆ Class 1 output
- ◆ Size: 114mm H x 112mm Dia



### Worklight—Medium Flood

81267

- ◆ Long life—50,000+ hours
- ◆ Weather resistant IP68 rating
- ◆ Energy Efficient
- ◆ Voltage range: 12—24V DC
- ◆ 117mm x 117mm x 67mm
- ◆ Polycarbonate Lens
- ◆ Aluminium Housing



### Worklight—Flood

81705

- ◆ Long life—50,000+ hours
- ◆ Extruded Aluminium Housing
- ◆ Weather resistant IP68 Rating
- ◆ Energy Efficient
- ◆ Voltage Range: 9—32V DC
- ◆ Virtually unbreakable polycarbonate lens
- ◆ Cross slider multi-angle mounting bracket
- ◆ Size: 236mm x 103mm x 65mm



WEB: [www.austutilities.com.au](http://www.austutilities.com.au)  
EMAIL: [sales@austutilities.com.au](mailto:sales@austutilities.com.au)

PHONE: 08 9406 3200